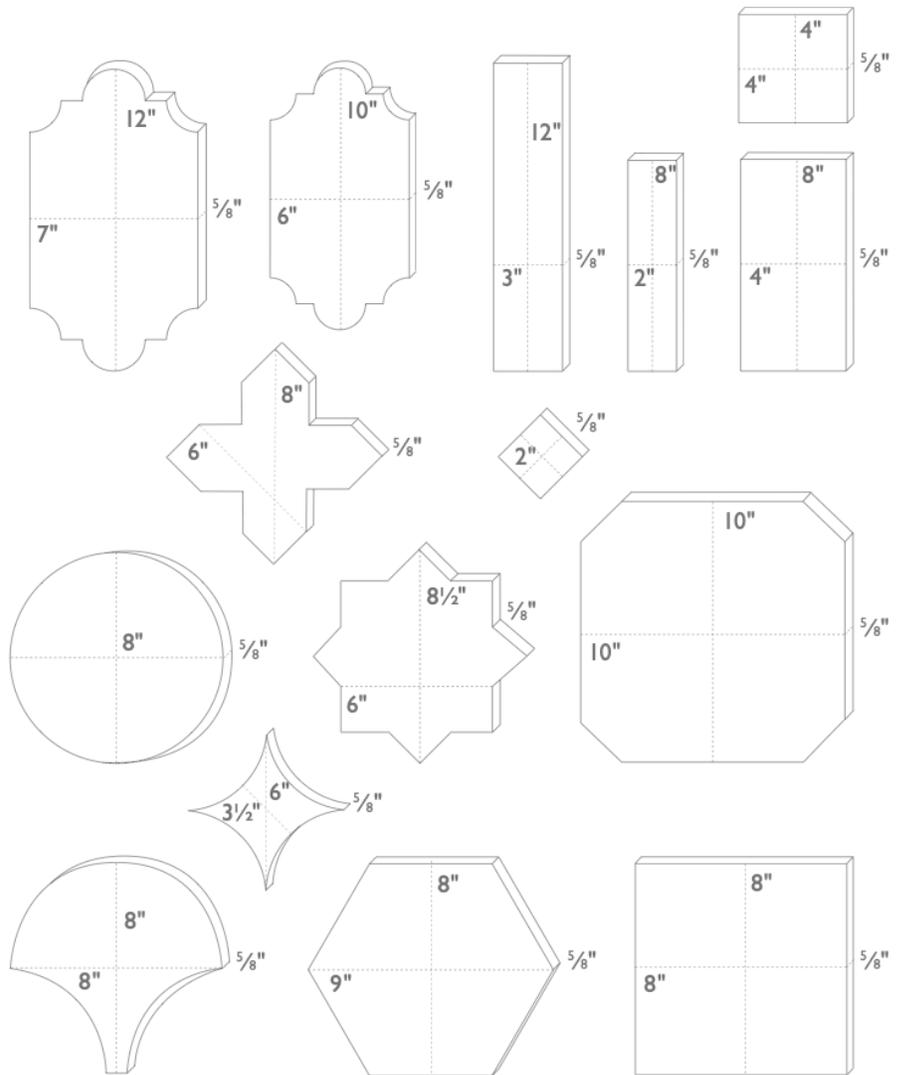
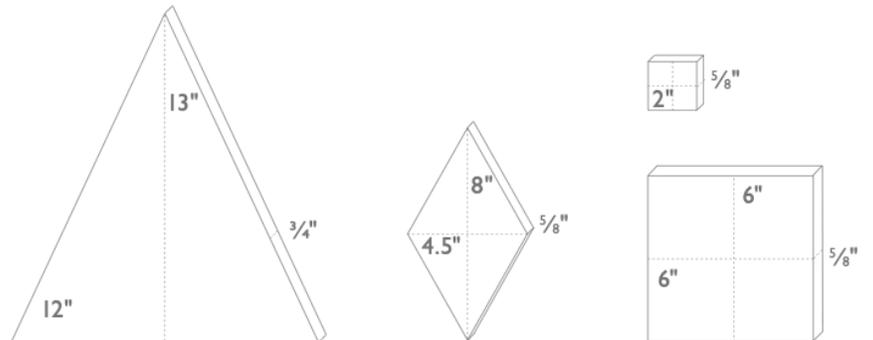


# ENCAUSTIC CEMENT

USAGE	Y / N
interior floor	Y*
interior wall	Y*
exterior floor	Y*
exterior wall	Y*
residential heavy traffic	Y
commercial light traffic	Y
radiant heating compatible	Y
fireplace surround	Y
shower	Y*
steam shower	Y*
fountain	N
freeze thaw	N
pool	N
heat resistant	N
sink backsplash	Y*
stove backsplash	Y*
grout joint size	1/16"
UV resistant	N



Made to order sizes:



**Standard thickness for cement under 12" x 12" is 5/8".**

Standard thickness for cement over 12" x 12" is 3/4".

Please note all dimensions are nominal. Additionally, dimensions may vary +/- 1/8".

\*There are specific installation requirements for this usage. Please discuss with your installer.

# ENCAUSTIC CEMENT

---

**What's in our tile:** Our encaustic cement tiles do not use kilns or other firing processes, therefore no fossil fuels are burned during production. Instead they are processed in a way that allows them to be free of energy costs involved in the firing process of ceramic tiles. They are created using basic earth components—natural pigments mixed with ground marble dust, white portland cement and sand. Instead of firing, our cement tiles are made by pouring the materials into a mold, then being hydraulically pressed and stacked in a water bath to cure. The end result is a durable, safe and long lasting tile.

Our cement tiles are made up of three different layers:

Top layer = known as the 'color' and design layer is made of natural pigments mixed with ground marble dust and the finest white portland cement.

Middle layer = a mortar made of fine sand and portland cement that provides for compression reinforcement for heavy traffic and furniture.

Bottom layer = solid concrete made to be strong and porous for impact strength before and after installation.

Due to the handmade craftsmanship of our tiles and the variety of materials used, there will be degrees of variation in color, shade and texture across production lots or batches. This means that your sample may not be a perfect match with your actual order, and that your add-on order may not be a perfect match to either. **This is the beauty of artisanal tile!**

---

## INSPECTING YOUR SHIPMENT

- Due to the natural pigments used in production of cement tiles, there will be degrees of variation in color and shade in your order, therefore it is important to blend the tiles from all boxes once they arrive and place them in their installation area to ensure you have the layout you want before installing.
- Dust and shipping residue\* are to be expected and should be cleaned prior to installing.
- Irregular or chipped edges and cracked surfaces are also to be expected and normal.
- Industry standard suggests adding at least 15% overage due to tile cuts, potential shipping breakage, or future repairs.

\* NOTE: Smudging caused by friction during shipping, and clouding of the tile surface due to humidity are uncommon, but these issues can sometimes occur.

- Smudging tends to be more common/ noticeable on contrasting black and white patterned tiles.
- In general, our recommended 15% overage should cover any smudging or clouding found within an order. Smudging or clouding can occur on cement tiles but generally comes off by itself during the installation process. If needed, the tiles can easily be sanded down by hand with 400 grit sandpaper to fully remove these marks prior to grouting/sealing.
- All of our cement tiles have a pigment layer that is roughly 1/8" (+/- 1/16") thick, so sanding will ONLY effectively remove the top-most micro-layer of the tile surface to access the fresh pigment underneath.

---

## INSTALLATION FYIs

- clé offers general information about our tiles and their unique qualities and usages. Proper installation will only be attained if you have selected a seasoned installer with years of experience with artisan tiles. Any installer without artisan tile experience will not know how to install clé tiles and will likely result in failed installations.
- As is standard in the tile industry, installation deems acceptance of materials. Do not install if there are visible issues. If you have any doubts or are unsure of what qualifies as a visible issue for the tile you are installing, please reach out to us PRIOR to installation. Our tiles are subject to variations in color, texture, size and finish. Misuse by contractor or end-user including but not limited to negligence, physical and/or chemical abuse is not covered by clé's warranty.
- Tile is merely the surface of your construction. Installation problems will arise from inexperienced artisan tile installers, substrate or construction engineering and/or installation issues. Please refer to your project architect, structural engineer and/or installer for best results. PLEASE CONFIRM YOUR INSTALLER'S LEVEL OF ARTISAN TILE EXPERIENCE. Your installation will only be as good as your installer.
- Before installing, make sure to lay out your tile and blend so that variations in color are where you would like them to be and are evenly distributed throughout the installation. Do not install without blending tiles from all boxes.
- Do not use blue tape or other construction tape during product installation. We cannot guarantee that the tape will not erode or damage our products.
- Install the tiles as late as possible in the project to minimize the risk of damaging the tile.
- If you plan to install your tile prior to the installation of cabinets, fixtures, etc., refinishing will likely be necessary before your installation can be considered finished. Shipping imperfections is also alleviated by a refinishing as the final step of installation.
- Please work with your project architect, structural engineer and/or installer to make sure that this final step is being accounted for in your project timeline and budget to ensure that you are getting the desired final look on your installation.
- To accommodate variations in tile sizes, wedge spacers should be used when needed to keep tile lines straight.
- Cement tiles are not UV resistant and will fade over time from sun exposure. dark colors such as black, dark blue, purple and green colors will fade faster than other colors.
- For more information please refer to the current edition of the TCNA Handbook for best installation results and ANSI A137.1 American National Standard Specifications for Ceramic Tile.

---

## INSTALLATION AREAS

- Cement tiles can be installed on interior and exterior floors, including heavy residential and commercial traffic areas.
- Cement tiles can be used on fireplace surrounds.
- Cement tiles are radiant heating compatible.
- Cement tiles can be installed on backsplashes, in bathrooms, showers and steam showers with the application of a penetrating sealer.
- Cement tiles can be used as a stove backsplash. Please consult with your installer to see if a range splash is required for your installation.
- Cement tiles can be used on interior and exterior walls. Please refer to the “Sealing, Maintenance, and Care” section below for exterior sealing recommendations.
- Cement tiles are not freeze/thaw rated on their own.
- Cement tiles should not be installed in pools or fountain areas.

---

## GROUT

- clé ONLY recommends Mapei Flexcolor CQ grout for cement tile installations.
- Grout color selection is always up to our client and/or their design professional. However, clé is often asked for our opinion on best grout selections for our tiles. And due to the large array of grout colors that are now available, clé would like to offer this general guideline on a grout color selection for any of your clé tiles.
  - First, have your contractor complete your tile installation, except for the grout portion.
  - Next, ask your contractor to bring ALL grout color charts from his preferred grout manufacturer for your review.
  - Lastly, choose a time of day when you are most pleased with the lighting in your space (either natural lighting, installed lighting or a blend of both). During that lighting and time of day, select the grout color that best matches your tile selection.
  - If you are working with patterned cement tiles, highly color-variegated tiles or a combination of tiles, we recommend that you follow the above recommendations—but match your grout to the color in your pattern that you would like to accentuate.
- If your contractor is having any issues or questions regarding this grout, please reach out to Mapei tech support directly at 1-800-992-6273 as they are the best and fastest line of contact.

## SEALING, MAINTENANCE, AND CARE

- Please follow Laticrete’s [Sealing, Maintenance, and Care Guide](#) for more guidance on cleaning, maintaining, and caring for your tile installation.
- **If you have any questions regarding Laticrete products or how to use them, please contact Laticrete directly by phone: 1-800-243-4788 X 1235.**













## ADDITIONAL SPECIFICATIONS

### COLOR, TEXTURE AND SIZE VARIATION

Due to the handmade craftsmanship of many of our tiles and the variety of materials used, there are degrees of variation in our tiles color, shade and texture. These differences are more pronounced in certain types of tiles than others, especially in tiles from separate production lots, or “batches”. This makes it unlikely that your sample will be a perfect match with your actual order or that your add-on order will be a perfect match to your first order. You can also expect to have both chips and cracks in the tiles.

The following is a guide for the different degrees of variation that we have assigned our tiles:

Cement tiles are rated ‘level 3 medium’ for color variation, ‘level 1 smooth’ for texture variation, and ‘level 1 slight’ for size variation.

CATEGORY	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	LEVEL 5
COLOR VARIATION	 low	 slight	 medium	 heavy	 extreme
TEXTURE VARIATION	 smooth	 slight	 medium	 heavy	n/a
SIZE VARIATION	 slight	 medium	 heavy	 extreme	n/a

## IMPERFECTIONS

Cement tiles are rated 'level 1 will occur' for chips, and 'level 1 light' for cracks.

	LEVEL 1	LEVEL 2	LEVEL 3
PITS/CHIPS	 will occur	 prevalent	 heavy
CRACKS	 light	 medium	 heavy

---

## FLOOR RATING

Cement tiles are rated IV (can be used for light residential to heavy commercial foot traffic).

### I light residential

for residential areas with light foot traffic. examples can include bathroom, bedroom, formal dining and living rooms. please note the following:

- not suitable for shoes with hard sole profiles (cleats, stilettos, etc.)
- the floor must be kept clean from abrasive debris (gravel, mud, salt, etc.)
- immediately clean all stains (food, personal and household care products, oils, paints, chemicals etc.)

### II heavy residential

for residential areas with continuous foot traffic. examples can include entry, hallway, kitchen, foyer, laundry and mud rooms. please note the following:

- the floor must be kept clean from abrasive debris (sand, gravel, mud, salt, etc.)
- immediately clean all stains (food, personal and household care products, oils, paints, chemicals etc.)

### III light commercial

for commercial areas with light foot traffic. examples can include commercial offices, doctor's offices and boutiques. please note the following:

- the floor must be kept clean from abrasive debris (sand, gravel, mud, salt, etc.)
- immediately clean all stains (food, personal and household care products, oils, paints, chemicals etc.)

#### **IV** heavy commercial

for commercial areas with continuous foot traffic. examples can include hotel lobby, retail, corridors in an office building, shopping mall and restaurant. please note the following:

- the floor must be kept clean from abrasive debris (sand, gravel, mud, salt, etc.)
- immediately clean all stains (food, personal and household care products, oils, paints, chemicals etc.)

#### **V** industrial

standard industrial floor use with no extreme, heavy breakage or spillage. examples can include restaurant kitchen, bar work area, winery production, exterior hotel entry, airport, car showroom, driveway. please note the following:

- the floor must be kept clean from abrasive debris (sand, gravel, mud, salt, etc.)
- immediately clean all stains (food, personal and household care products, oils, paints, chemicals etc.)

---

## **PRODUCT DESCRIPTION**

Hydraulic pressed handmade cement tiles.

---

## **PRODUCT COMPONENTS**

Wear colored layer: 3 to 4 mm +/- thickness affixed to the tile body by 1,700 PSI mechanical pressure, composed of: white portland cement, marble dust and mineral pigments for color (oxides and organic).

Tile Body: 12 mm +/- in thickness, composed of gray portland cement & sand.

Our cement tiles are made up of three different layers:

Top layer = known as the 'color' and design layer made of natural pigments mixed with ground marble dust and the finest white portland cement.

Middle layer = a mortar made of fine sand and portland cement that provides for compression reinforcement for heavy traffic and furniture.

Bottom layer = solid concrete made to be strong and porous for impact strength before and after installation.

---

## DIMENSIONS

Rectangle	5 cm x 20 cm x 1.6 cm (2" x 8" x 5/8") / .34 kg per tile (.75 lb) 10 cm x 20 cm x 1.6 cm (4" x 8" x 5/8") / .68 kg per tile (1.5 lbs) 7.6 cm x 30.5 cm x 1.6 cm (3" x 12" x 5/8") / .77 kg per tile (1.7 lbs)
Square	5 cm x 5 cm x 1.6 cm (2" x 2" x 5/8") / .08 kg per tile (.18 lb) 10 cm x 10 cm x 1.6 cm (4" x 4" x 5/8") / .34 kg per tile (.75 lb) 15 cm x 15 cm x 1.6 cm (6" x 6" x 5/8") / .71 kg per tile (1.5 lbs) 20 cm x 20 cm x 1.6 cm (8" x 8" x 5/8") / 1.36 kg per tile (3 lbs)
Diamond	11 cm x 20 cm x 1.6 cm (4.5" x 8" x 5/8") / 1.36 kg per tile (3 lbs)
Hexagon	20 cm x 23 cm x 1.6 cm (8" x 9" x 5/8") / 1.36 kg per tile (3 lbs) 15 cm x 18 cm x 1.6 cm (6" x 7" x 5/8") / .71 kg per tile (1.5 lbs)
Scallop	20 cm x 20 cm x 1.6 cm (8" x 8" x 5/8") / .68 kg per tile (1.5 lbs)
Triangle	30 cm x 33 cm x 1.9 cm (12" x 13" x 3/4") / 1.59 kg per tile (3.5 lbs)
Lantern	15 cm x 25 cm x 1.6 cm (6" x 10" x 5/8") / 1 kg per tile (2.2 lbs) 18 cm x 30 cm x 1.6 cm (7" x 12" x 5/8") / 1.27 kg per tile (2.8 lbs)
Star	15 cm x 20 cm x 1.6 cm (6" x 8" x 5/8") / .89 kg per tile (1.98 lbs)
Cross	15 cm x 20 cm x 1.6 cm (6" x 8" x 5/8") / .69 kg per tile (1.54 lbs)
Octagon	25 cm x 25 cm x 1.6 cm (10" x 10" x 5/8") / 2 kg per tile (4.5 lbs)
Bouchon	5 cm x 5 cm x 1.6 cm (2" x 2" x 5/8") / .08 kg per tile (.18 lb)
Circle	20 cm x 20 cm x 1.6 cm (8" x 8" x 5/8") / .68 kg per tile (1.5 lbs)
Losange	15 cm x 9 cm x 1.6 cm (6" x 3 1/2" x 5/8") / .29 kg per tile (.66 lbs)

\* Please note all dimensions are nominal. Additionally, dimensions may vary +/- 1/8".

---

## AVERAGE COEFFICIENT OF FRICTION (DCOF ACUTEST)

“Wet Dynamic Coefficient of Friction” (DCOF)—avg. 0.74\*

Please note that the application of a sealant may help increase slip resistance.

---

## **FREEZE/THAW RESISTANCE (ASTM C1026)**

Cement tiles are not freeze/thaw resistant.

---

## **WATER ABSORPTION (ASTM C373)**

avg. 10.9%; non-vitreous.

---

## **ACID RESISTANCE**

Cement tiles are not resistant to acids and should be cleaned with pH neutral cleaner.

---

## **LEED CREDITS**

The product is an inherently non-emitting source of VOCs (stone, ceramic, metals, powder-coated metals, plated or anodized metal, glass, cement, clay brick, and unfinished or untreated solid wood) and has no integral organic-based surface coatings, binders, or sealants.

Our cement tiles are considered 'inherently non-emitting sources' under the Low-emitting Materials Credit of LEEDv4/v4.1, but our current pre-seal offering is not compliant with LEED. Because we offer them finished in a pre-polish & pre-seal format to support stain resistance, we would recommend ordering them without the sealant, in the pre-polish format only, in order to qualify for the Low-emitting Materials Credit.

'Inherently non-emitting' means that these tile types have been shown to not contribute emissions to indoor environments and are therefore exempt from demonstrating compliance with CDPH v1.1-2010 or CDPH v1.2-2017.

Use of these tiles as Wall or Flooring materials should be entered in the LEED v4.1 low-emitting materials Calculator and identified as 'inherently non-emitting' in the Products Tab (Column L).

Disclosures for MR Credit Material Ingredient Disclosures under LEEDv4/v4.1, are not available at this time. We are exploring our disclosure options and hope to have these available Q1/Q2 of 2020.

Disclosures for MR Credit Environmental Product Declarations under LEEDv4/4.1, are not available at this time. We are exploring our disclosure options and have not established a timeline for completion.

Contribution to MR Credit Material Sourcing under LEEDv4/v4.1, does not apply as there is no recycled content, no bio-based materials, no wood, no reused products included in our tile at this time. Extended producer responsibility programs are highly difficult to manage given the nature of end-of-use tile removal methods. *Tile can last hundreds of years but fashions often change, which is the dominant reason for its removal. We work hard to ensure our cement tiles can withstand the tests of time while remaining timeless.*

---

## **RECYCLED CONTENT**

There is no recycled content in our cement tiles at this time. See material sourcing disclosure above.

---

## **PERCENTAGE OF PRE-CONSUMER AND/OR POST-CONSUMER MATERIALS**

There is no pre-consumer or post-consumer material content in our tiles at this time. See material sourcing disclosure above.

---

## **FIRE RATING**

We currently do not have fire testing results for our cement tiles and are exploring our testing options.

